

Drg No :- C 44736

SPECIFICATION

ACTUATING FORCE :- 3.9N MAX.

RELEASE FORCE :- 1.1N MIN


FREE POSITION :- 15.9 MAX.

OPERATING POSITION :- $14.5^{+0.5}$




MOVEMENT DIFFERENTIAL:- 0.4 MAX

OVERTRAVEL (AVAILABLE) :- DEPRESS
TO CASE.SWITCH ENCLOSURE TESTED TO A
PRESSURE OF 3.86 BAR (56 P.S.I.)THIS SWITCH HAS A COMPONENT
CERTIFICATE TO EN50018:2000.
FLAMEPROOF ENCLOSURE 'D' SWITCH
COMPONENTS MUST NOT BE ALTERED
WITHOUT REFERENCE TO BASEEFA
CERTIFICATE No. BASO1ATEX2358U.

DIAGRAM OF CONNECTIONS

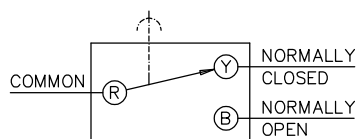

INSTALLATION DRAWING

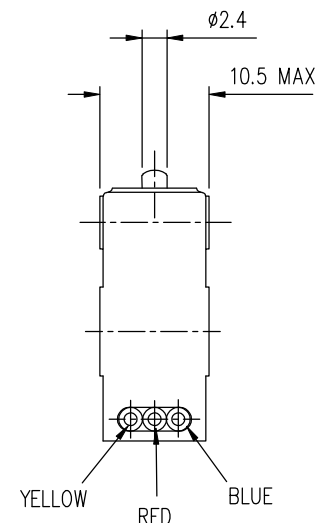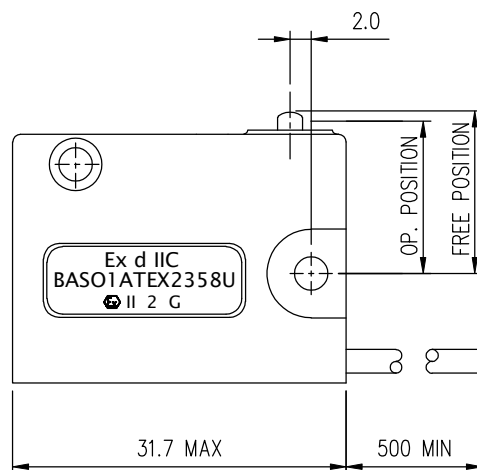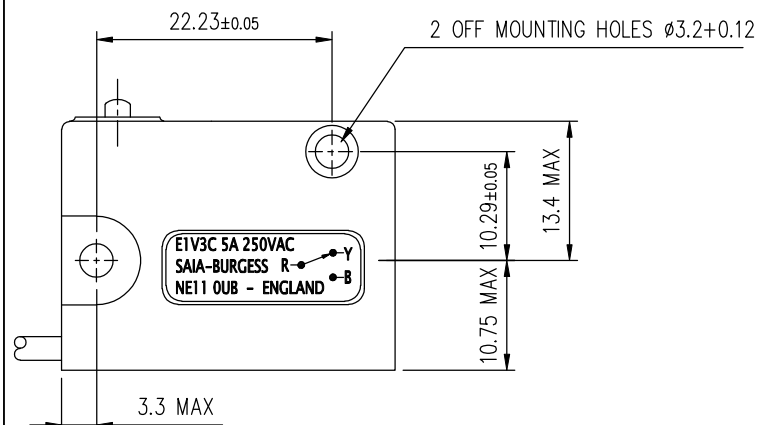

BASEEFA Certified Product
NO MODIFICATIONS PERMITTED
WITHOUT THE APPROVAL OF THE
APPROVAL ENGINEER

SWITCH FREE VOLUME LESS THAN 1cc.

2		10/11/C
	FIRST ISSUE	
ISSUE	REVISION	DATE

saia-burgess

Smart solutions for comfort and safety

Saia-Burgess Gateshead Limited
Dukesway, Team Valley Trading Estate
Gateshead, Tyne & Wear NE11 0UB
Tel: +44 (0) 191 401 6100
Fax: +44 (0) 191 401 6322
www.saia-burgess.co.uk



DO NOT SCALE !

THIS DRAWING MUST ONLY BE
AMENDED ON A CAD SYSTEMALL DIMENSIONS SPECIFIED
IN MILLIMETRES

TOLERANCES UNLESS STATED:-

NO DECIMAL PLACE ±0.50

1 DECIMAL PLACES ±0.25

2 DECIMAL PLACES ±0.15

ANGULAR ±1°

INCH - OUNCE UNITS [IN BRACKETS]

APPROVED

DRAWN	A. GREY	CHECKED BY	
DATE	15.07.03	ENGINEERING	
SCALE	2:1	QUALITY ASSURANCE	

TITLE / DESCRIPTION

E1V3C ATEX
(KESTREL)

Drg No :- C 44736

A3