


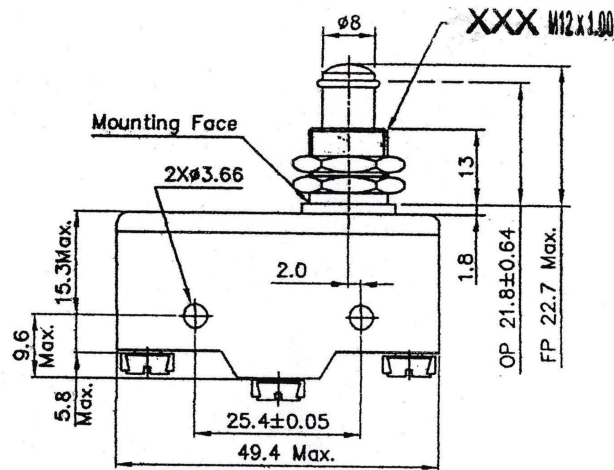

WIDTH 17.6 Max.

Technical specifications :

Free position (Max.)	: 22.7 mm
Operating position	: 21.8±0.64 mm
Pretravel (Max.)	: 0.9 mm
Movement Differential(Max.)	: 0.08 mm
Overtravel	: 3.3 mm
Actuating Force (Max.)	: 420 gms
Release Force(Min.)	: 170 gms
Actuator	: Large spring plunger actuator with single hole or side mounting.
Mechanism	: Single-pole, Changeover
Electrical Ratings	
AC (Resistive)	: 15A, 125V or 15A, 250V or 15A, 440V
AC (Inductive)	: 15A, 125V or 15A, 250V or 4A, 440V
DC (Resistive)	: 0.5A, 125V or 0.25A, 250V
DC (Inductive)	: 0.05A, 125V or 0.03A, 250V
Technical Data	
Contact resistance	: 10 milliohms (max.)
Insulation resistance	: 1000 Megaohms (min.)
Voltage proof	: 1 KV AC for one minute
Terminals	: Three M3.5 screws and cup washers.
Electrical life	: 50,000 operations
Mechanical life	: 1 million operations.


CAT. No.: MTP-26

ISS.	DATE	MODIFICATION	SIGN.

TOLERANCES
UNLESS
OTHERWISE
SPECIFIED

±0.1

SCALE 1:1



MICRO SWITCH
"T - SERIES"
'MTP-26'



ESSEN DEINKI,
22, INDUSTRIAL AREA, PHASE II,
CHANDIGARH - 160 002.

DIMENSIONS IN MM

	DATE	SIGN.
DESIGN	22.09.11	
DRAWN	22.09.11	
CHKD.		
APPD.		

DRG. NO.

MTCU-122. A4.

SHEET 1 OF 1