

# V5B010CB1D

REPLACES

DRAWING  
NUMBER

10



## REVISIONS

6	16.1.95
---	---------

CN15758


12/85

W.K.

CHECK

DESIGN

AUTHOR: N

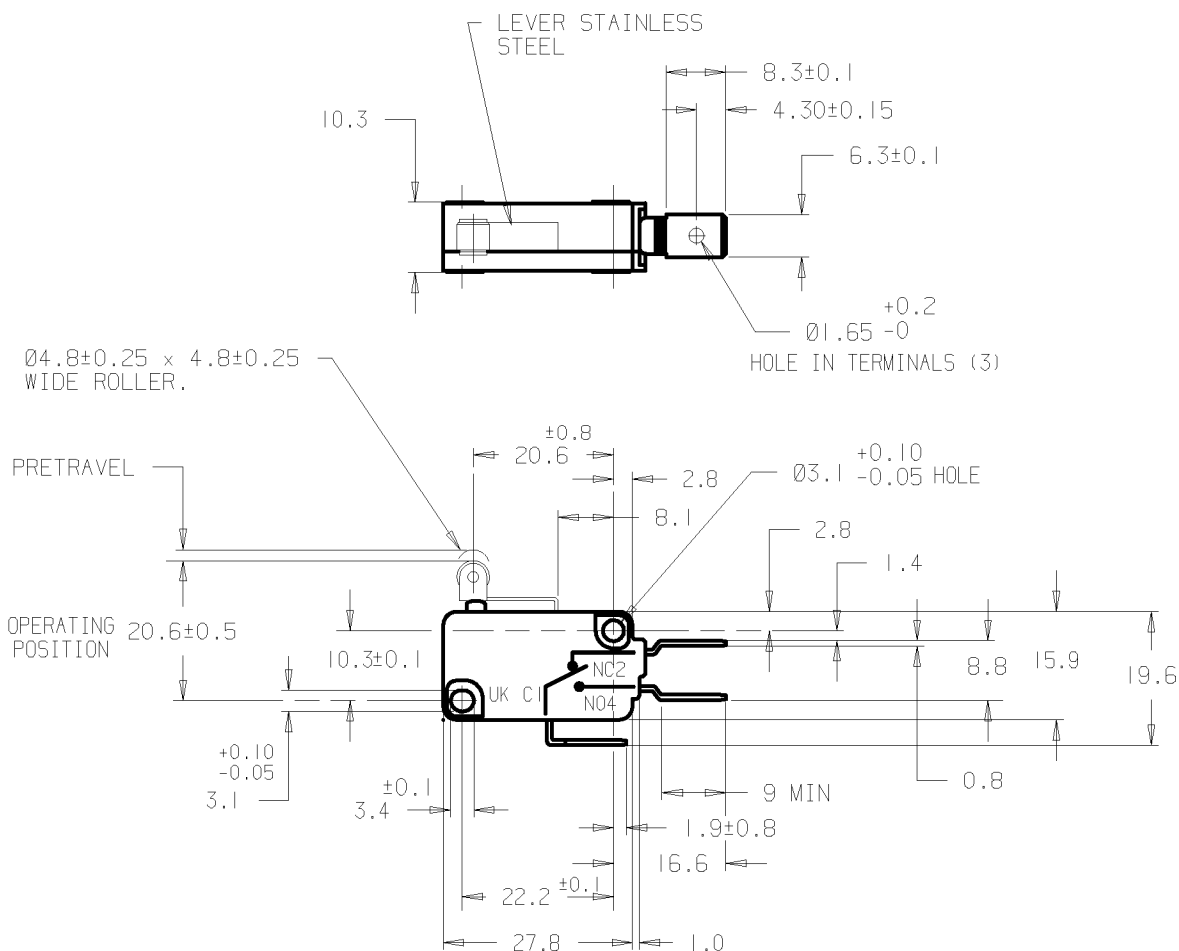



NOTES :-

1. MOUNTING HOLES WILL ACCEPT Ø3 MAX PINS OR SCREWS.
2. TERMINALS WILL ACCEPT 6.3 WIDE QUICK CONNECT RECEPTACLES AND COMPLY WITH BS3955 AND DIN46244 REQUIREMENTS.
3. SWITCHES ARE APPROVED BY SEV AT 16(4)A 250VAC.
4. THERMOPLASTIC CASE, COVER AND PHENOLIC PLUNGER.

THE COPYRIGHT OF THIS DRAWING IS THE PROPERTY OF HONEYWELL LTD.  
THE DRAWING IS SUPPLIED IN CONFIDENCE AND MUST NOT BE USED FOR  
ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED.

THIRD ANGLE  
PROJECTION



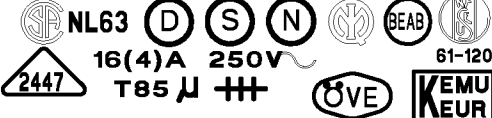CHARACTERISTICS	ELECTRICAL DATA		SCALE :- FULL SIZE
OPERATING FORCE _ _ _ 350g MAX _ _	CONTACT ARRANGEMENT S.P.D.T.	BREAK DISTANCE	DIMENSIONS ARE IN MILLIMETRES
DIFFERENTIAL FORCE _ _ _ _ _			TOLERANCES UNLESS OTHERWISE STATED
RELEASE FORCE _ _ _ _ _ 60g MIN _ _			±0.4
FREE POSITION _ _ _ _ _			
PRETRAVEL _ _ _ _ _ 1.6 MAX _ _			
DIFFERENTIAL TRAVEL _ 0.25 MAX _ _			
OVERTRAVEL _ _ _ _ _ 0.8 MIN _ _			ANGULAR ±
FULL OVERTRAVEL FORCE _ _ _ _ _			MODIFY ON CAD3D SYSTEM ONLY